

SOURCEBOOK

jamovi

DATA ANALYSIS

Abstract: This chapter provides step-by-step instructions on how to obtain basic statistical output using jamovi, both visually with screenshots and via written instructions. Simple examples for most undergraduate-level between-subjects and within-subjects research designs are provided.

Keywords: jamovi, screenshots, directions for use

Original: July 2017

Updated: January 2025

This document is part of an online statistics sourcebook.

A browser-friendly viewing platform for the sourcebook is available:

<https://cwendorf.github.io/Sourcebook>

All data, syntax, and output files are available:

<https://github.com/cwendorf/Sourcebook>


TABLE OF CONTENTS FOR THIS CHAPTER

Frequencies and Descriptives.....	3
Transformations and Standardized Scores	5
Correlations	8
Confidence Intervals	9
One Sample t Test.....	11
Paired Samples t Test.....	13
Independent Samples t Test	15
OneWay ANOVA.....	17
Post Hoc Comparisons	19
Repeated Measures ANOVA	21
Factorial ANOVA.....	23

Frequencies and Descriptives


Selecting the Analysis

1. First, enter the data (described elsewhere).
2. On the “Analyses” tab, select the “Exploration → Descriptives” option.

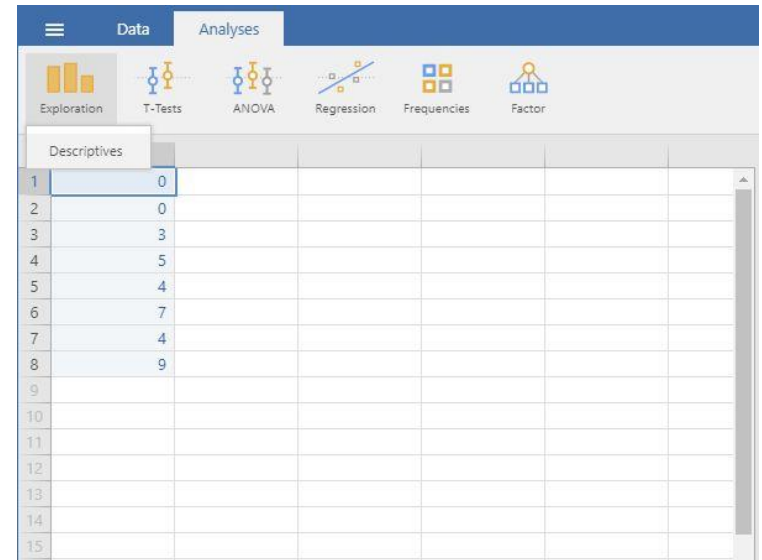


Obtaining Frequencies

3. A set of options will then appear for you to choose the variables and statistics of interest.
4. Select the variables you wish to analyze by clicking on them in the left-hand box and then the arrow to move them into the right-hand box.
5. Be sure that “Frequency tables” is checked. Without this checked, you will not get a frequency distribution.
6. Output will automatically appear on the right side of the window.

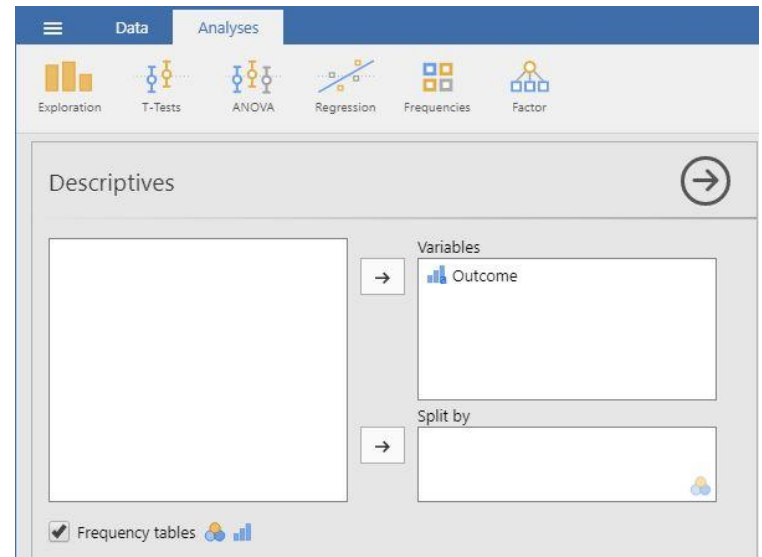

Obtaining Descriptive Statistics

7. Though some basic summary statistics are displayed by default, you can make changes by expanding the "Statistics" drop-down menu.
8. As you select the desired statistics, the output on the right side of the window will be automatically updated.
9. Individual tables (or even the whole section of Output) can be copied using the drop-down arrow options in the output. These can be pasted into other word processing software for printing purposes.

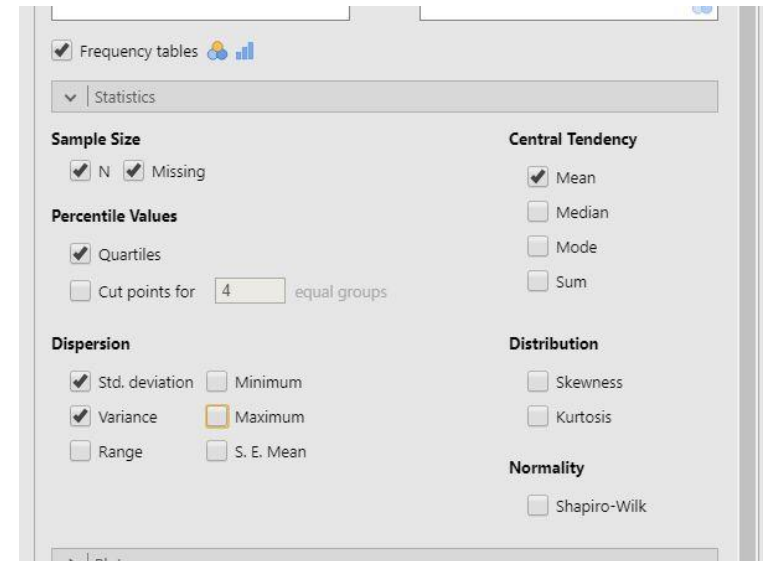

Your data have now been analyzed!

Transformations and Standardized Scores

Selecting the Analysis

1. First, enter the data (described elsewhere).
2. After the data are entered, click on the column representing the data you wish to transform.
3. Select the “Compute” option from the menu. This will bring up a new set of options.

	Outcome			
1	0			
2	0			
3	3			
4	5			
5	4			
6	7			
7	4			
8	9			
9				
10				
11				
12				
13				
14				
15				

Computing Transformations

4. Type in the new you wish to give the new variable (here it is “trOutcome”).
5. Click on the “fx” button to obtain the dropdown menu.
6. Click on the variable you wish to transform (“Outcome”). This will place it in the formula editor. Then add, subtract, multiply, or divide as needed to get the transformation you want.
7. Hit “Enter” on your keyboard to perform the data transformation.
8. To hide the setup menu, click on the large UP arrow button to the right of the variable name.

COMPUTED VARIABLE

trOutcome

Description

Formula f_x = Outcome+1

Functions

- VSUM
- VAR
- VVAR
- Z
- Logical
- IF

Variables

- Outcome
- trOutcome (current)


trOutcome

Variable: Outcome

This is a data variable.

Viewing Transformed Scores

- Note that transformed variables are not included in the output. Rather, they are saved as new variables in the data view window.
- These variables can be used in subsequent analyses. You can follow the previous tutorials to get descriptive statistics for these variables.

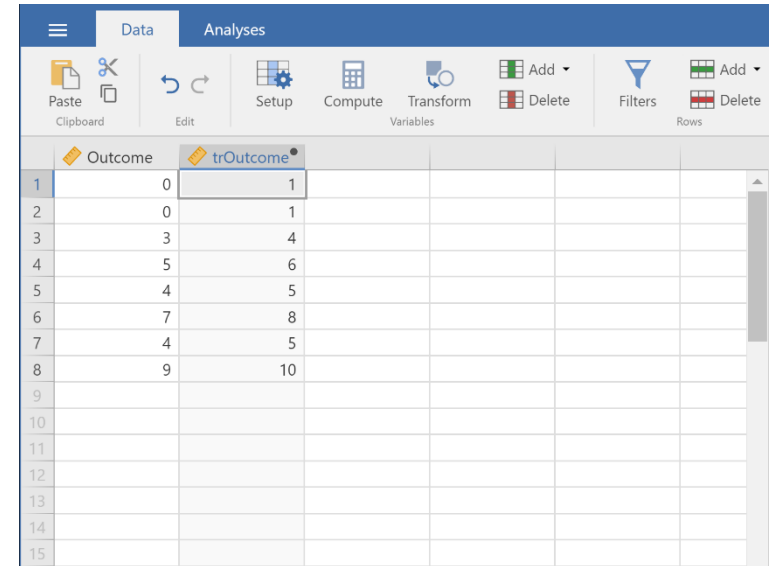


The screenshot shows a software interface with a menu bar containing 'Data' and 'Analyses'. Below the menu bar is a toolbar with icons for 'Paste', 'Clipboard', 'Edit', 'Setup', 'Compute', 'Transform', 'Variables', 'Add', 'Delete', 'Filters', and 'Rows'. The main area displays a data table with two columns: 'Outcome' and 'trOutcome'. The data is as follows:

	Outcome	trOutcome
1	0	1
2	0	1
3	3	4
4	5	6
5	4	5
6	7	8
7	4	5
8	9	10
9		
10		
11		
12		
13		
14		
15		

Obtaining Standardized Scores

- In addition, you can obtain standardized scores. First, enter the data (described elsewhere).
- After the data are entered, click on the column representing the data you wish to transform.
- Select the "Compute" option from the menu. This will bring up a new set of options.

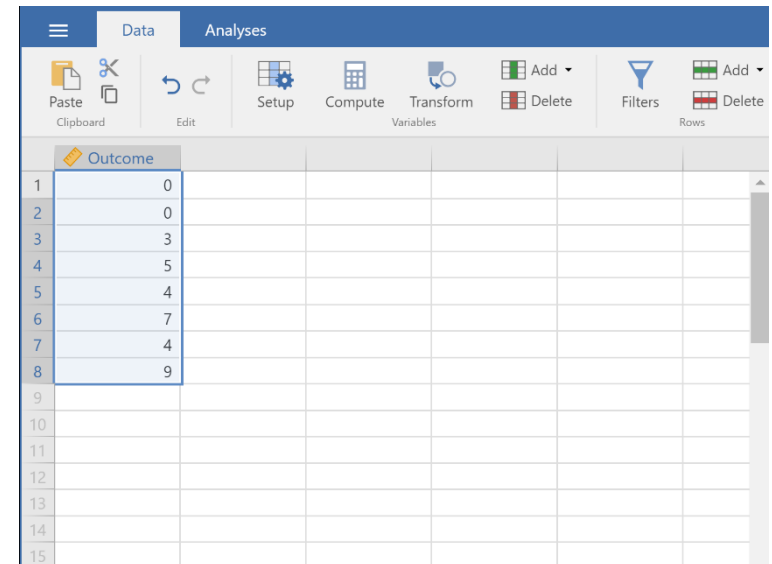


The screenshot shows the same software interface as above, but with only one column, 'Outcome', visible. The data is as follows:

	Outcome
1	0
2	0
3	3
4	5
5	4
6	7
7	4
8	9
9	
10	
11	
12	
13	
14	
15	

Computing Standardized Scores

14. Type in the new you wish to give the new variable (here it is "zOutcome").
15. Click on the "fx" button to obtain the dropdown menu. On the left side under functions, click on "z" to place it in the formula editor.
16. Click on the variable you wish to transform ("Outcome"). This will place it in the formula editor.
17. Hit "Enter" on your keyboard to perform the data transformation.
18. To hide the setup menu, click on the large UP arrow button to the right of the variable name.

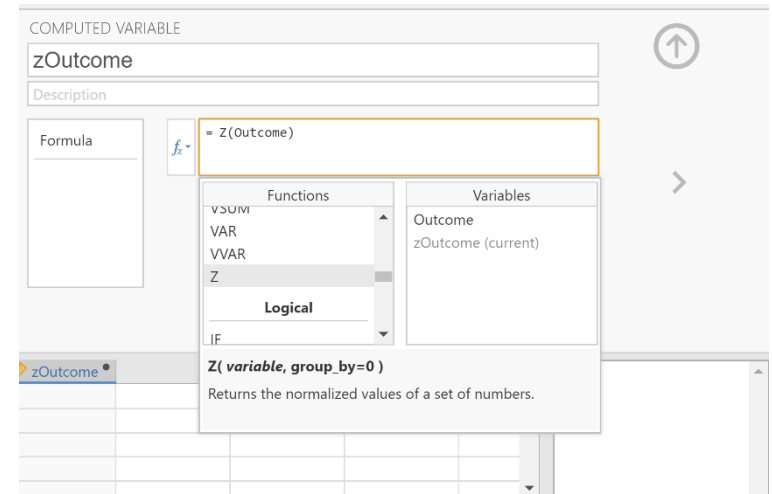

Viewing Standardized Scores

19. Note that transformed variables are not included in the output. Rather, they are saved as new variables in the data view window.
20. These variables can be used in subsequent analyses. You can follow the previous tutorials to get descriptive statistics for these variables.


	Outcome	zOutcome				
1	0	-1.283				
2	0	-1.283				
3	3	-0.321				
4	5	0.321				
5	4	0.000				
6	7	0.963				
7	4	0.000				
8	9	1.604				
9						
10						
11						
12						
13						
14						
15						

Your data have now been analyzed!

Correlations


Selecting the Analysis

1. First, enter data involving multiple variables (described elsewhere).
2. On the “Analyses” tab, select the “Regression → Correlation Matrix” option.

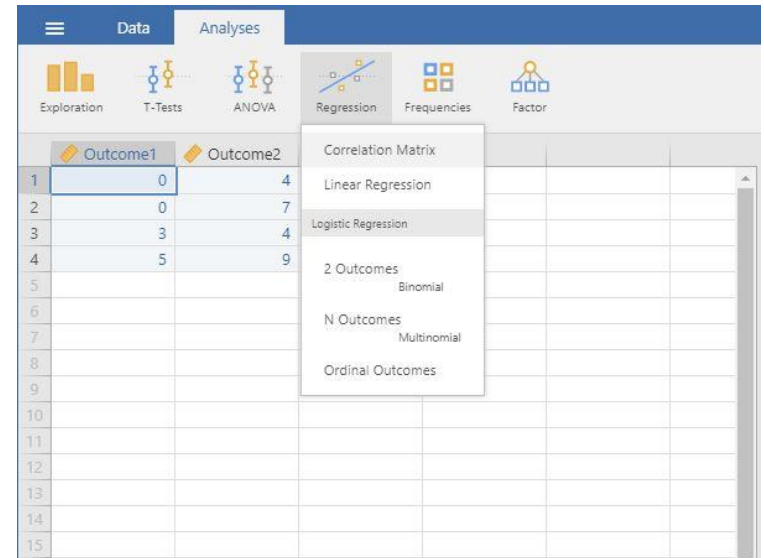

Obtaining Inferential Statistics

3. A set of options will then appear for you to choose the variables and statistics of interest.
4. Select the variables you wish to analyze by clicking on them in the left-hand box and then the arrow to move them into the right-hand box.
5. Output (with no descriptive statistics) will automatically appear on the right side of the window. Output can be copied and pasted into other documents for printing.
6. If you wish descriptive statistics associated with each variable, follow the “Descriptives” procedures described earlier in this manual.

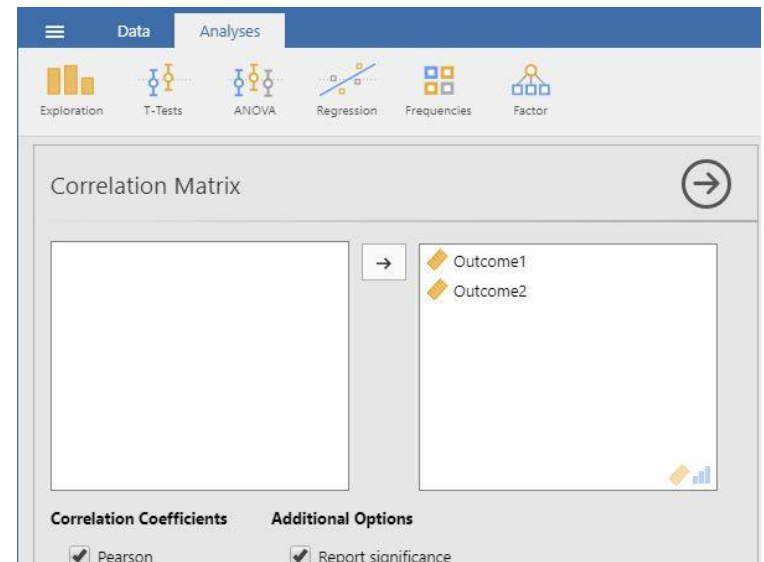


Your data have now been analyzed!

Confidence Intervals


Selecting the Analysis

1. First, enter the data (described elsewhere).
2. On the "Analysis" tab, select the "T-Tests → One Sample T-Test" option.

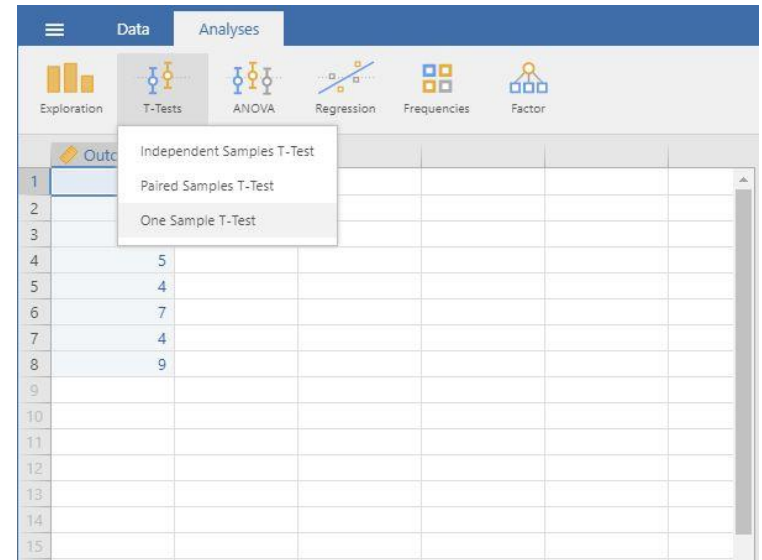

Choosing Variables

3. A set of options will then appear for you to choose the variables and statistics of interest.
4. Select the variable you wish to analyze by clicking on it in the left-hand box and then the arrow to move it into the right-hand box.
5. Output will automatically appear on the right side of the window. Output can be copied and pasted into other documents for printing.

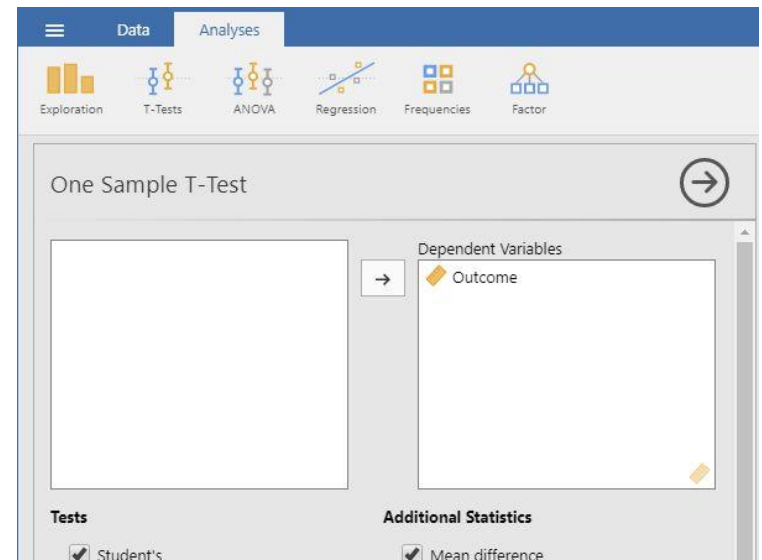

Obtaining Inferential Statistics

6. To get the confidence interval for the mean, make sure the “Test Value” is set to zero.
7. Check the “Confidence Interval” box (and alter the width of the interval if desired).
8. Similarly, select other options that are important for you: “Descriptives” will offer a mean and standard deviation for the variable; and “Descriptives plots” will provide a graph of the confidence interval.
9. Updated output will automatically appear on the right side of the window. Output can be copied and pasted into other documents for printing.


The image shows a screenshot of the SPSS 'Tests' dialog box. The 'Tests' section has 'Student's' checked, 'Bayes factor' unchecked, and 'Wilcoxon rank' unchecked. The 'Prior' is set to 0.707. The 'Hypothesis' section has 'Test value' set to 0, with radio buttons for '≠ Test value' (selected), '> Test value', and '< Test value'. The 'Missing values' section has 'Exclude cases analysis by analysis' selected. The 'Additional Statistics' section has 'Mean difference' and 'Effect size' unchecked, 'Confidence interval' checked, and 'Interval' set to 95%. 'Descriptives' and 'Descriptives plots' are checked. The 'Assumption Checks' section has 'Normality (Shapiro-Wilk)' and 'Normality (Q-Q plot)' unchecked.

Your data have now been analyzed!

One Sample t Test


Selecting the Analysis

1. First, enter the data (described elsewhere).
2. On the “Analysis” tab, select the “T-Tests → One Sample T-Test” option.

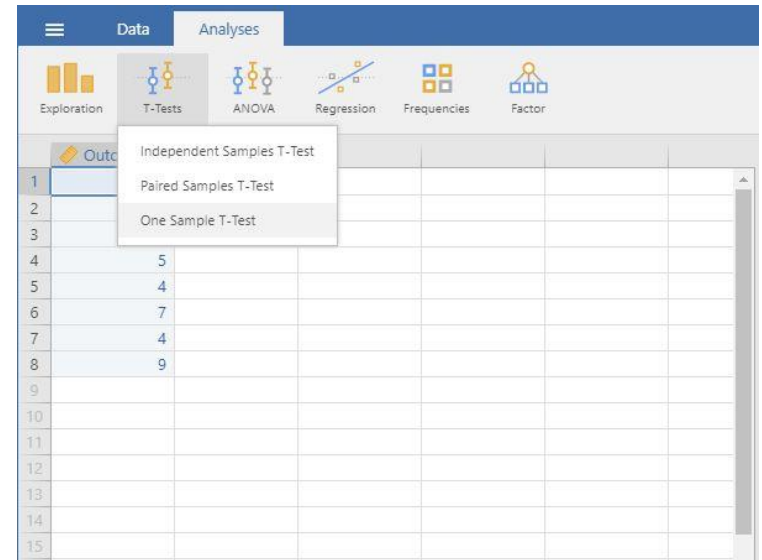


Obtaining Inferential Statistics

3. A set of options will then appear for you to choose the variables and statistics of interest.
4. Select the variable you wish to analyze by clicking on it in the left-hand box and then the arrow to move it into the right-hand box.
5. Output will automatically appear on the right side of the window. Output can be copied and pasted into other documents for printing.

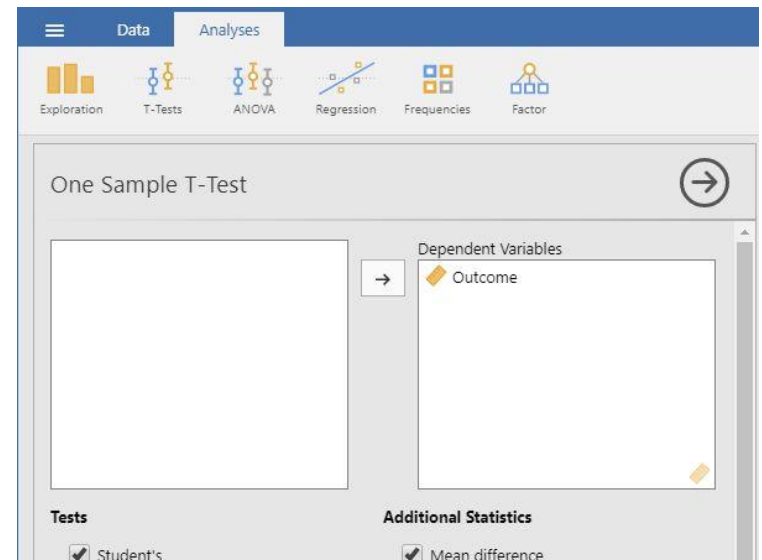

Obtaining Additional Statistics

6. Be sure to enter a known or hypothesized mean into the “Test Value” field. If you do not enter a value here, jamovi will automatically use zero as the comparison mean.
7. If you wish to view (and alter) the width of the confidence interval, check the “Confidence Interval” box.
8. Similarly, select other options that are important for you: “Mean Difference” will display the size of the difference between the two means; “Effect size” will display Cohen’s d ; and “Descriptives” will offer a mean and standard deviation for the variable.
9. Updated output will automatically appear on the right side of the window. Output can be copied and pasted into other documents for printing.

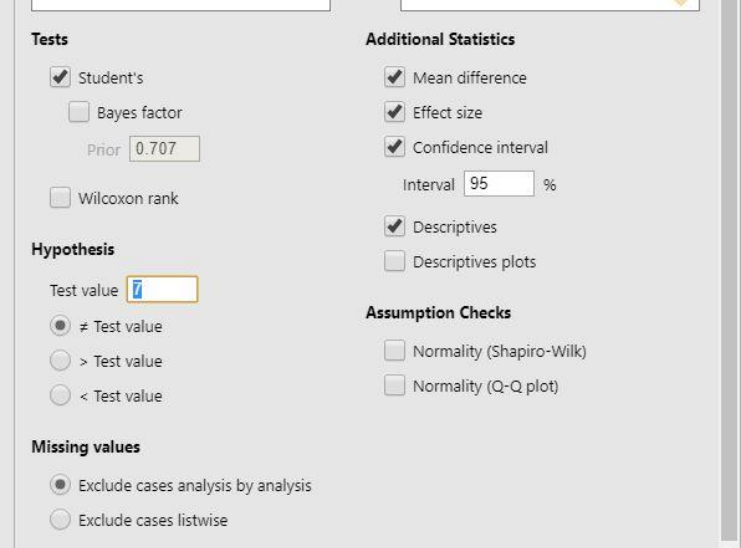

The screenshot shows the Jamovi software interface with the following settings:


- Tests:**
 - Student's
 - Bayes factor
 - Prior: 0.707
 - Wilcoxon rank
- Hypothesis:**
 - Test value: 1
 - ≠ Test value
 - > Test value
 - < Test value
- Missing values:**
 - Exclude cases analysis by analysis
 - Exclude cases listwise
- Additional Statistics:**
 - Mean difference
 - Effect size
 - Confidence interval
 - Interval: 95 %
 - Descriptives
 - Descriptives plots
- Assumption Checks:**
 - Normality (Shapiro-Wilk)
 - Normality (Q-Q plot)

Your data have now been analyzed!

Paired Samples t Test


Selecting the Analysis

1. First, enter paired samples or repeated measures data (described elsewhere).
2. On the “Analysis” tab, Select the “T-Tests → Paired Samples T-Test” option.

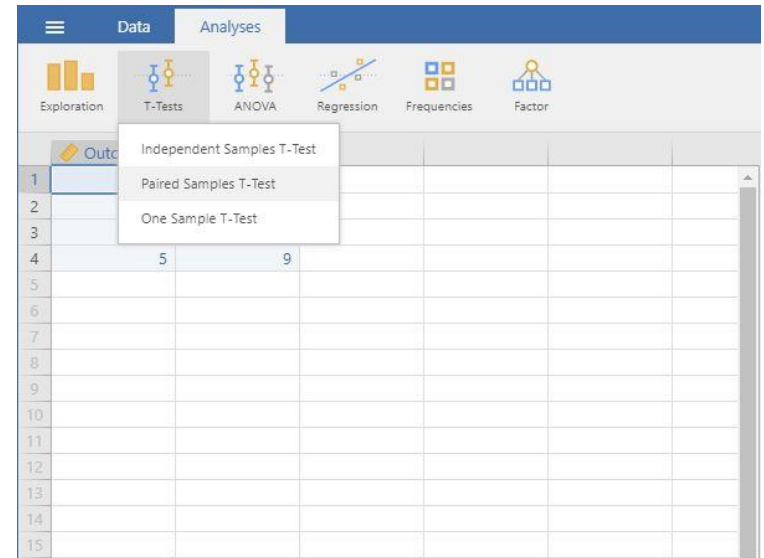


Obtaining Inferential Statistics

3. A set of options will then appear for you to choose the variables and statistics of interest.
4. Select the variables you wish to analyze by clicking on both of them while holding down the “CTRL” key. Then click on the arrow to move the pair of variables to the right-hand box.
5. Output will automatically appear on the right side of the window. Output can be copied and pasted into other documents for printing.

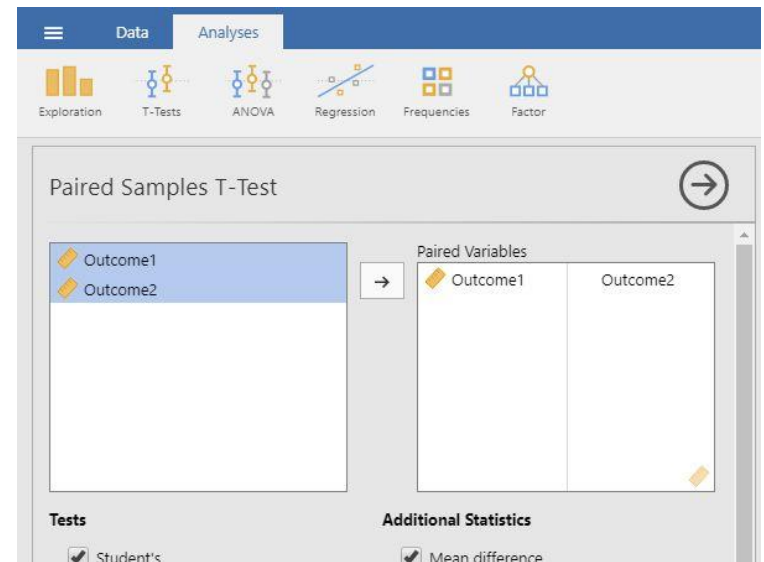

Obtaining Additional Statistics

- If you wish to view (and alter) the width of the confidence interval, check the “Confidence Interval” box.
- Similarly, select other options that are important for you: “Mean Difference” will display the size of the difference between the two means; “Effect size” will display Cohen’s d ; and “Descriptives” will offer means and standard deviations for each variable.
- Updated output will automatically appear on the right side of the window. Output can be copied and pasted into other documents for printing.

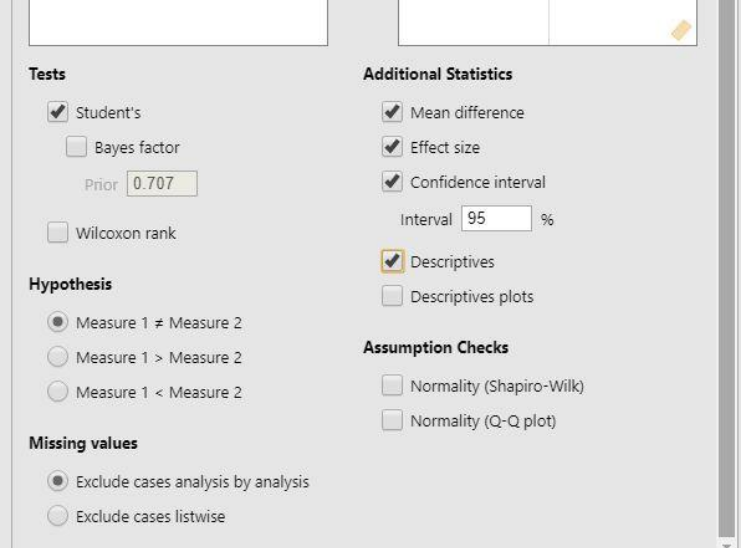

The image shows a screenshot of the SPSS 'Additional Statistics' dialog box. The dialog is divided into several sections:


- Tests:** Includes checkboxes for 'Student's' (checked), 'Bayes factor', and 'Wilcoxon rank'. A 'Prior' field is set to 0.707.
- Hypothesis:** Includes radio buttons for 'Measure 1 ≠ Measure 2' (selected), 'Measure 1 > Measure 2', and 'Measure 1 < Measure 2'.
- Missing values:** Includes radio buttons for 'Exclude cases analysis by analysis' (selected) and 'Exclude cases listwise'.
- Additional Statistics:** Includes checkboxes for 'Mean difference' (checked), 'Effect size' (checked), 'Confidence interval' (checked), and 'Descriptives' (checked). The 'Confidence interval' is set to 95%.
- Assumption Checks:** Includes checkboxes for 'Normality (Shapiro-Wilk)' and 'Normality (Q-Q plot)', both of which are unchecked.

Your data have now been analyzed!

Independent Samples t Test


Selecting the Analysis

1. First, enter two sample data (described elsewhere).
2. On the “Analysis” tab, select the “T-Tests → Independent Samples T-Test” option.

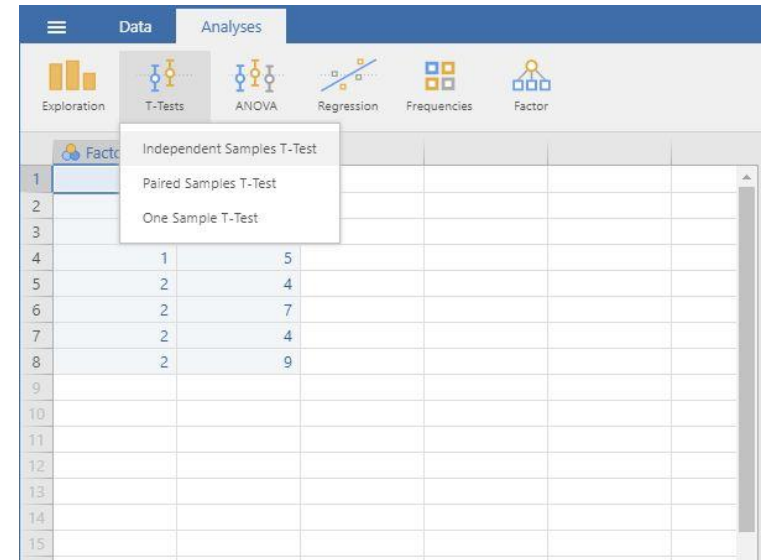

Obtaining Inferential Statistics

3. A set of options will then appear for you to choose the variables and statistics of interest.
4. Select the outcome variable and click the arrow to move it into the “Dependent Variables” box.
5. Move the Independent Variable to the “Grouping Variable” box.
6. Output will automatically appear on the right side of the window. Output can be copied and pasted into other documents for printing.

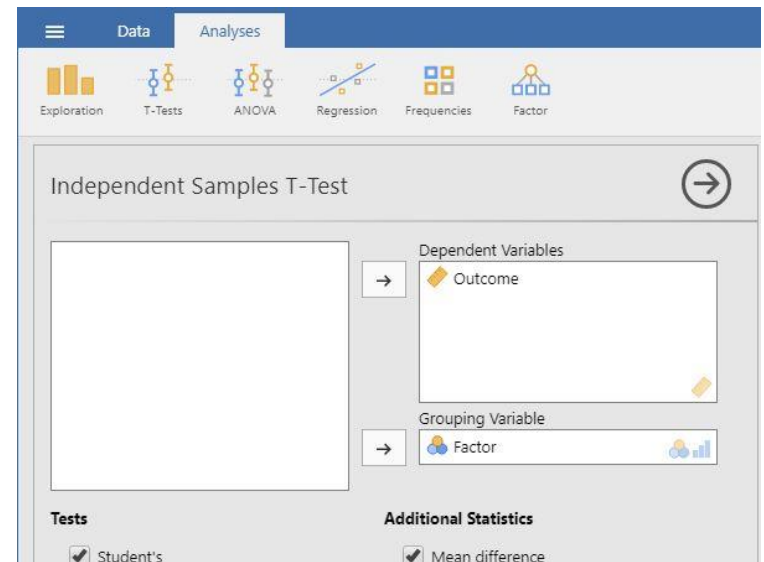

Obtaining Additional Statistics

7. If you wish to view (and alter) the width of the confidence interval, check the “Confidence Interval” box.
8. Similarly, select other options that are important for you: “Mean Difference” will display the size of the difference between the two group’s means; “Effect size” will display Cohen’s d ; and “Descriptives” will offer means and standard deviations for each group.
9. Updated output will automatically appear on the right side of the window. Output can be copied and pasted into other documents for printing.

Tests

Student's
 Bayes factor
Prior: 0.707

Welch's
 Mann-Whitney U

Hypothesis

Group 1 \neq Group 2
 Group 1 $>$ Group 2
 Group 1 $<$ Group 2

Missing values

Exclude cases analysis by analysis
 Exclude cases listwise

Additional Statistics

Mean difference
 Effect size
 Confidence interval
Interval: 95 %

Descriptives
 Descriptives plots

Assumption Checks


Normality (Shapiro-Wilk)
 Normality (Q-Q plot)
 Equality of variances

Your data have now been analyzed!

OneWay ANOVA


Selecting the Analysis

1. First, enter multiple group data (described elsewhere).
2. On the “Analysis” tab, select the “ANOVA → ANOVA” option.

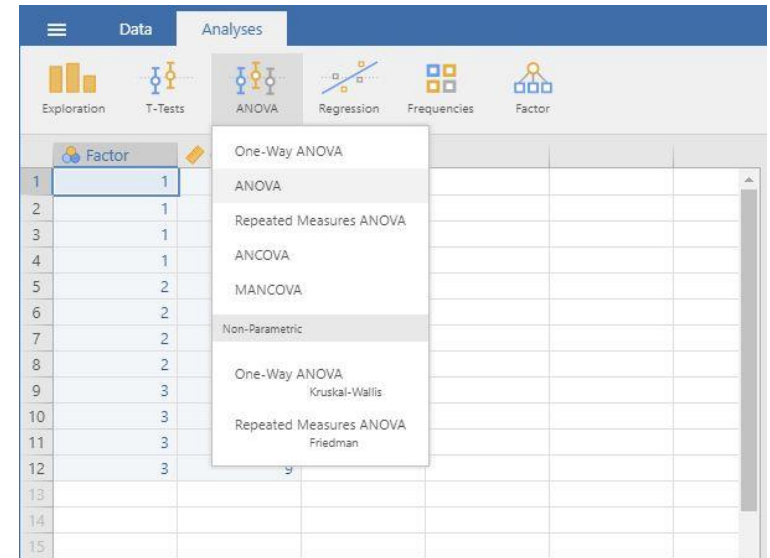


Obtaining Inferential Statistics

3. A set of options will then appear for you to choose the variables and statistics of interest.
4. Select the outcome variable and click the arrow to move it into the “Dependent Variable” box.
5. Move the Factor (Independent Variable) to the “Fixed Factors” box.
6. Output will automatically appear on the right side of the window. Output can be copied and pasted into other documents for printing.

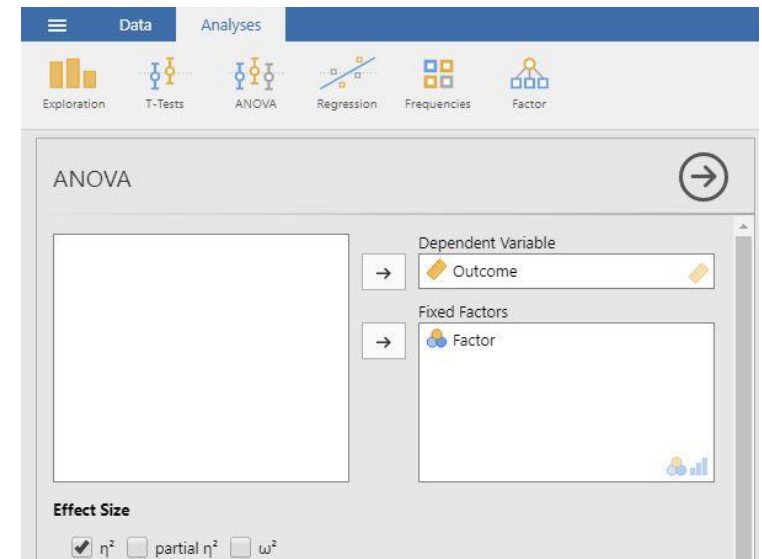

Obtaining Additional Statistics

7. Choose an effect size measure from the “Effect Size” list.
8. If you wish descriptive statistics for each group, use the “Descriptives” command described earlier in the sourcebook.
9. Updated output will automatically appear on the right side of the window. Output can be copied and pasted into other documents for printing.

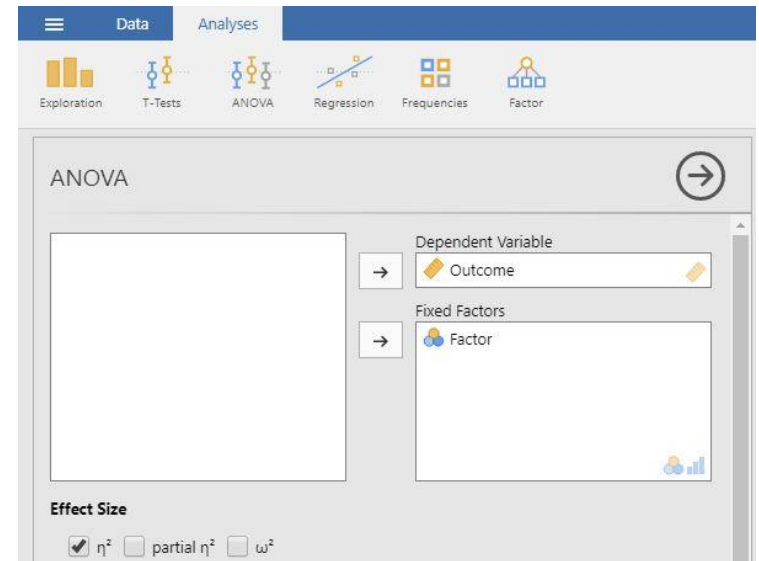


Your data have now been analyzed!

Post Hoc Comparisons


Selecting the Analysis

1. First, enter multiple group data (described elsewhere).
2. On the “Analysis” tab, select the “ANOVA → ANOVA” option.

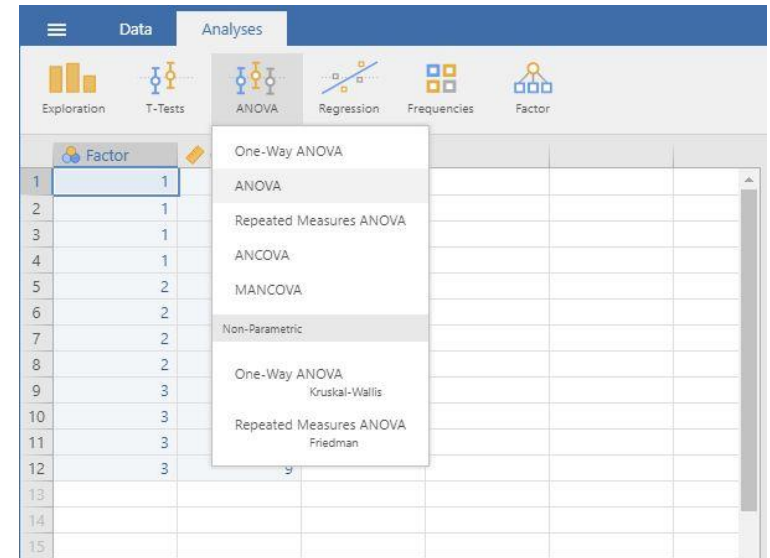

Obtaining Inferential Statistics

3. A set of options will then appear for you to choose the variables and statistics of interest.
4. Select the outcome variable and click the arrow to move it into the “Dependent Variable” box.
5. Move the Factor (Independent Variable) to the “Fixed Factors” box.
6. Output will automatically appear on the right side of the window. Output can be copied and pasted into other documents for printing.


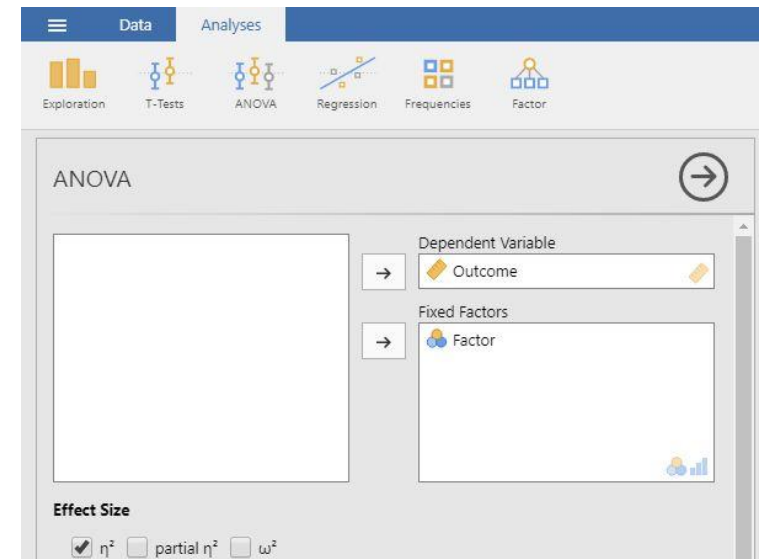


Obtaining Additional Statistics

7. Choose an effect size measure from the “Effect Size” list.
8. If you wish descriptive statistics for each group, use the “Descriptives” command described earlier in the sourcebook.
9. Updated output will automatically appear on the right side of the window. Output can be copied and pasted into other documents for printing.

Obtaining Post Hoc Tests

10. If you wish to obtain post hoc tests for the purpose of making comparisons between groups, click the “Post Hoc Tests” drop-down button.
11. Move the factor (Independent Variable) name from the left-hand box to the right-hand box.
12. Select “Tukey” to get Tukey HSD post hoc tests (or whatever option you prefer).
13. Updated output will automatically appear on the right side of the window. Output can be copied and pasted into other documents for printing.

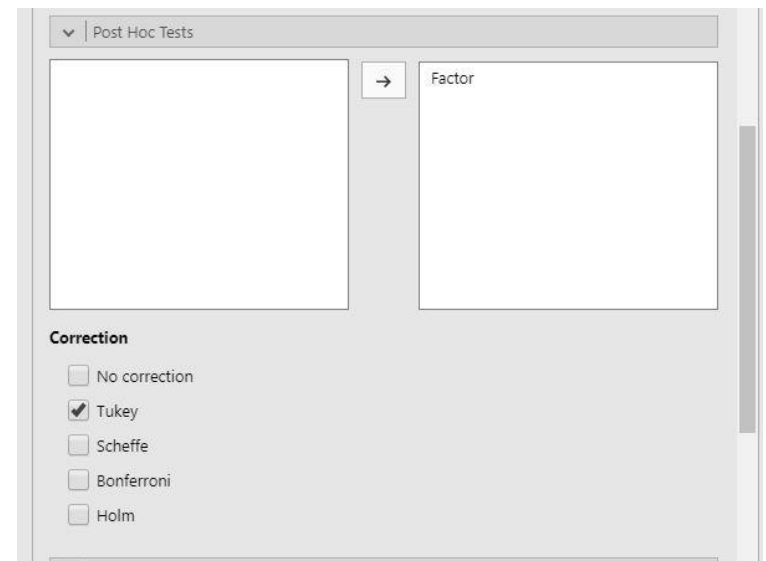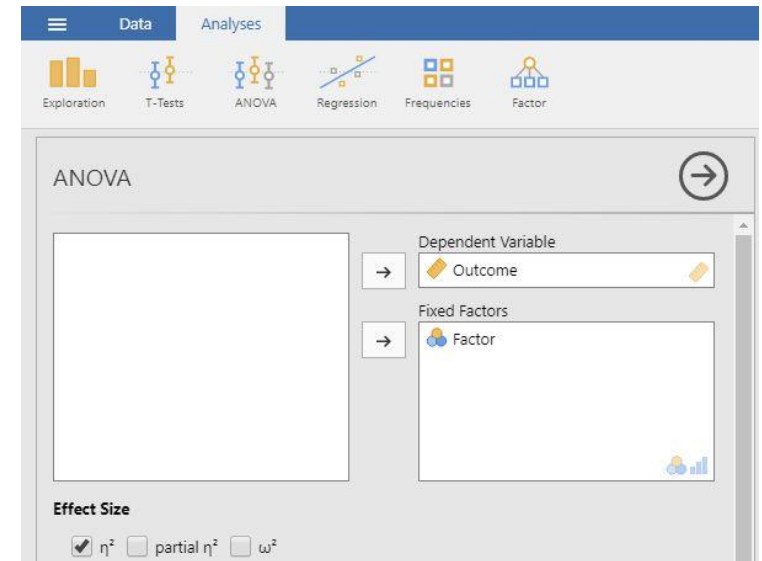


Your data have now been analyzed!

Repeated Measures ANOVA


Selecting the Analysis

1. First, enter repeated measures data (described elsewhere).
2. On the “Analysis” tab, select the “ANOVA → Repeated Measures ANOVA” option.

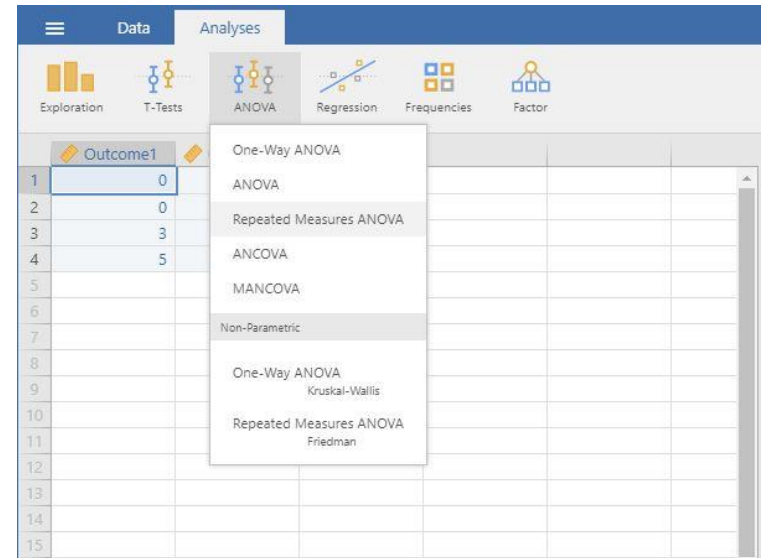

Labeling the Within-Subjects Variable/Factor

3. A set of options will then appear for you to choose the variables and statistics of interest.
4. In the “Repeated Measures Factors” box, you will define the repeated measures factor. This box is necessary for labeling the repeated measurements of the same underlying factor.
5. Click on “RM Factor 1” and type in the name you wish to give to the repeated measures factor. In this example, “Factor” is used as the name.
6. Below that, click on “Level 1” to type the name of the individual level of the repeated measures factor. You may do the same for each level. In this example, there were only 2 levels of the factor.

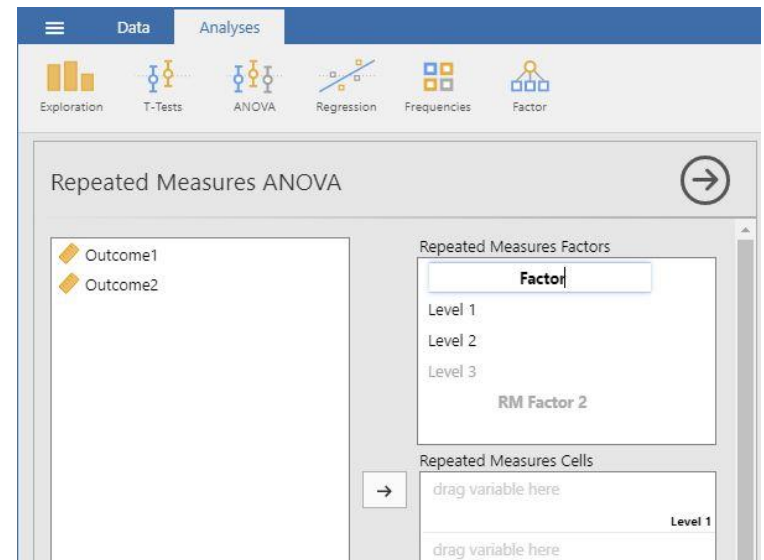

Obtaining Inferential Statistics

7. In the “Repeated Measures Cells” box, you will indicate which measurements/columns in the data set reflect the instances of the repeated measurements.
8. Select the instances you wish to associate with the factor by clicking on them and then arrow to move them. In this example, “Outcome1” reflects the first level of the factor and “Outcome2” reflects the second level of the factor.
9. Note that this factor only exists in the computer’s memory. For examples, nowhere in the data set will you see a variable called “Time.”
10. Output will automatically appear on the right side of the window. Output can be copied and pasted into other documents for printing.

Obtaining Additional Statistics

11. Choose an effect size measure from the “Effect Size” list.
12. If you wish descriptive statistics associated with each variable, follow the “Descriptives” procedures described earlier in this sourcebook.
13. Updated output will automatically appear on the right side of the window. Output can be copied and pasted into other documents for printing.

Exploration T-Tests ANOVA Regression Frequencies Factor

Repeated Measures ANOVA

Repeated Measures Factors

Factor

Level 1
Level 2
Level 3
RM Factor 2

Repeated Measures Cells

→ Outcome1 Level 1
Outcome2 Level 2

Between Subject Factors

→

Covariates

→

Effect Size

Generalised η^2 η^2 Partial η^2

Dependent Variable Label

Dependent


> Model
> Assumption Checks
> Post Hoc Tests
> Estimated Marginal Means
> Options

Your data have now been analyzed!

Factorial ANOVA


Selecting the Analysis

1. First, enter factorial data (described elsewhere).
2. On the “Analysis” tab, select the “ANOVA → ANOVA” option.

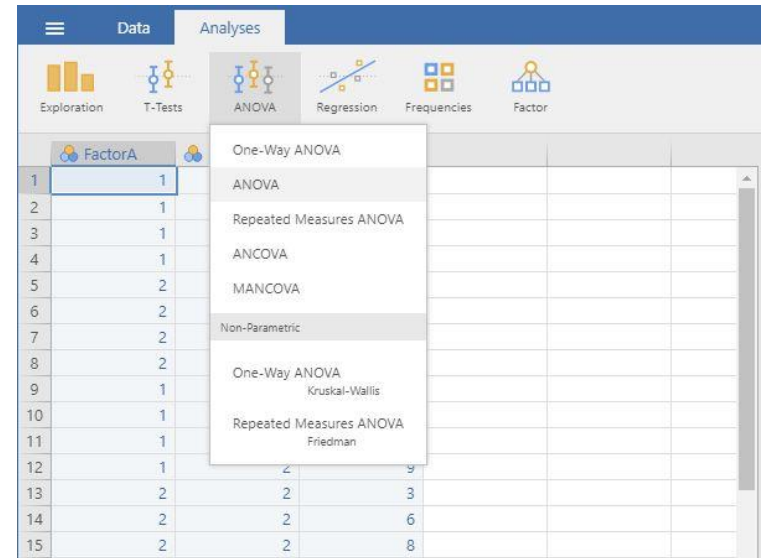


Obtaining Inferential Statistics

3. A set of options will then appear for you to choose the variables and statistics of interest.
4. Select the outcome variable and click the arrow to move it into the “Dependent Variable” box.
5. Move the multiple Factors (Independent Variables) to the “Fixed Factors” box. (The interaction term will be automatically generated in the output.)
6. Output will automatically appear on the right side of the window. Output can be copied and pasted into other documents for printing.

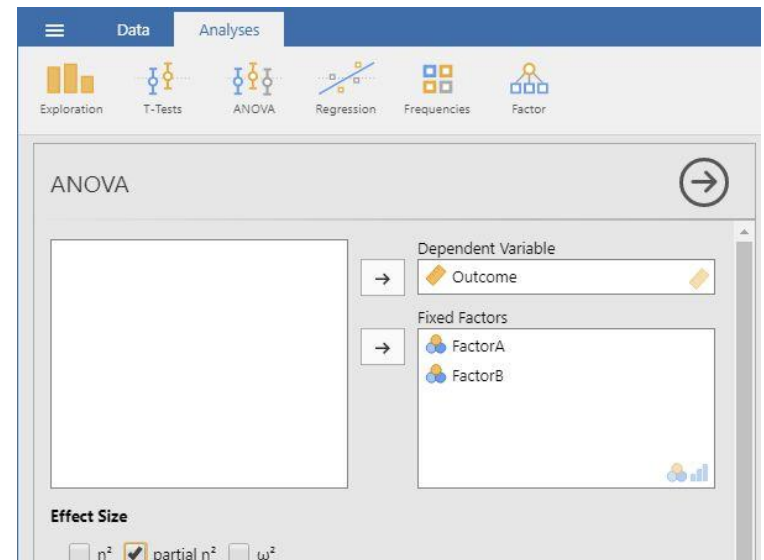

Obtaining Additional Statistics

7. Choose an effect size measure from the “Effect Size” list.
8. If you wish descriptive statistics associated with each variable, follow the “Descriptives” procedures described earlier in this sourcebook.
9. Updated output will automatically appear on the right side of the window. Output can be copied and pasted into other documents for printing.

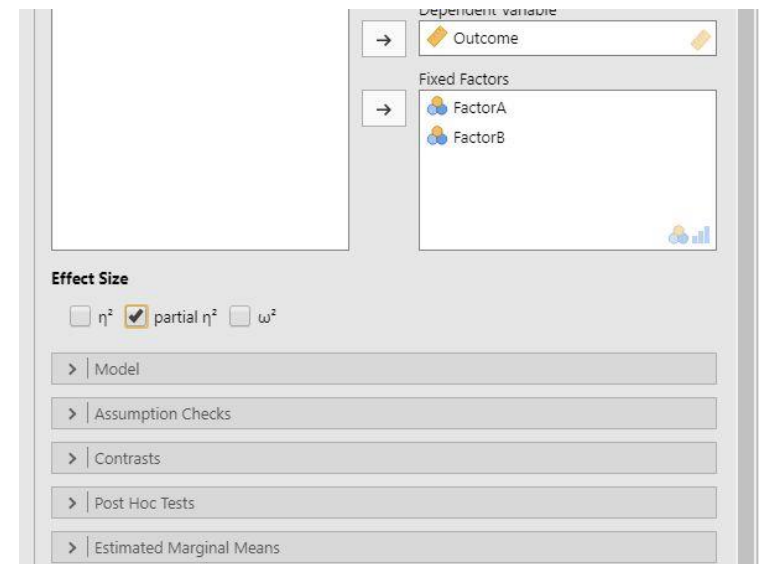

Your data have now been analyzed!